

CLASSIC OIL 8000

Classic oil for micromechanics



Description

Natural oil based on mineral oils and highly refined natural oils with remarkable stability. With excellent lubricity and adhesion, this oil is ideal for many applications.



Technical features (indicative values)

Appearance	Pale yellow
Viscosity at 0°C	280 cSt
Viscosity at 20°C	95 cSt
Viscosity at 40°C	41 cSt
Pour point	-20 °C
Density at 20°C	0.908 g/ml
Refraction index at 20 °C	1.472
Acidity	0.5 mg KOH / g


Unctuousness / Lubricity	
Viscosity / Texture	
Ageing resistance / Stability	
Adhesion / Grip	
Compatibility	Metals and some polymers
Application	Universal
Shelf life	2 years
Temperature range	-15 °C to +80 °C

Application fields

Classic oil to be used for :

- Precision micromechanics (watch, timer, measuring device , tools, ...)
- Instrumentation and counters (automotive, aeronautic, naval,...)
- Cameras and optical instruments
- General mechanics (office equipment, fans,...)
- Lubrication of fast mobiles with low torque (pendulum pivots, escapements, certain wheels,...)

Radar chart

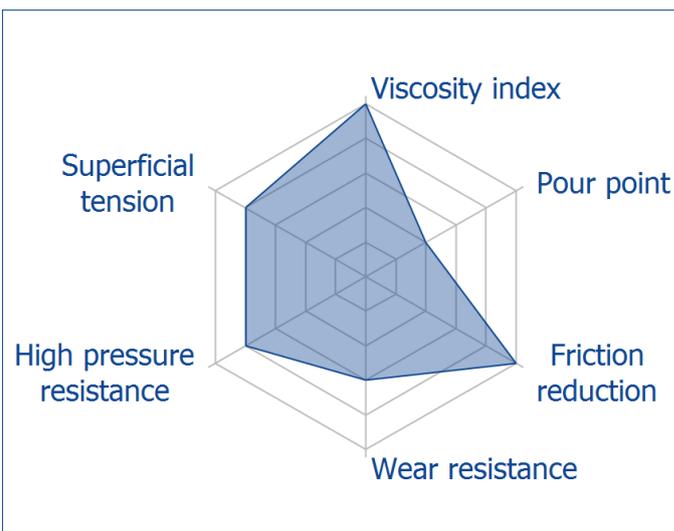

Storage

We advise keeping Moebius products in their original packaging in a clean and dry place, protected from light, ideally at a temperature of 15 to 26 °C.

After opening we recommend keeping the products for a maximum of 12 months.

