

MICROGLISS K-6


Classic oil for micromechanics



Description

This Microgliss oil has both a very good lubricity and resistance to pressure. It includes as additive a very powerful anticorrosive agent. This oil is ideal for applications with severe corrosion risks.

This product is recommended for dip lubrication.



Technical features (indicative values)

Appearance	Brown
Viscosity at 0°C	2600 cSt
Viscosity at 20°C	450 cSt
Viscosity at 40°C	125 cSt
Pour point	-12 °C
Density at 20°C	0.938 g/ml
Refraction index at 20 °C	1.492
Acidity	2.0 mg KOH / g


Unctuousness / Lubricity	
Viscosity / Texture	
Ageing resistance / Stability	
Adhesion / Grip	
Compatibility	Metals and some polymers
Application	Protection against high corrosion risks
Shelf life	3 years
Temperature range	-5 °C to +120 °C

Application fields

Classic anti-corrosion oil to be used for :

- Precision micromechanics (watch, timer, measuring devices, tools, ...)
- Instrumentation and counters (automotive, aeronautic, naval,...)
- Cameras and optical instruments
- General mechanics (office equipment, fans,...)
- Lubrication of slow mobiles with a large surface or for dip application (spring, ...)
- Lubrication of parts in difficult environments needing a good protection against corrosion and high pressure

Radar chart

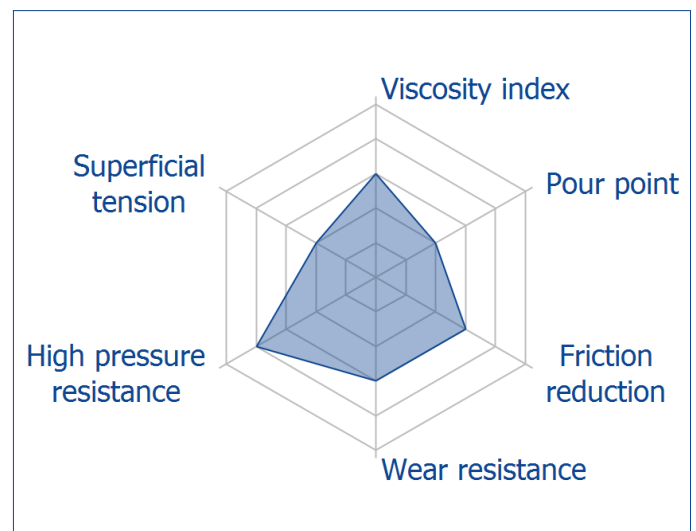

Storage

We advise keeping Moebius products in their original packaging in a clean and dry place, protected from light, ideally at a temperature of 15 to 26 °C.

After opening we recommend keeping the products for a maximum of 12 months.

