

CLASSIC GREASE 8200-FL


Classic grease for micromechanics



Description

Very flexible classic grease which has significant thixotropic properties. With vegetable oils as additive, it is ideal for friction of large surfaces, for slow mobiles and for the lubrication of ball bearings. Fusible, it can be used hot for dip lubrication.

The added fluorescent tracer allows visualizing the presence of small quantities of grease under UV illumination. Lubricating properties are identical to the 8200 standard grease.



Technical features (indicative values)

Appearance	Fluorescent yellow
Consistency	Semi-liquid
Drop point	33 °C
Viscosity at 40°C	Solid
Viscosity at 60°C	20 cSt
Viscosity at 80°C	13 cSt
Acidity	0.2 mg KOH / g


Unctuousness / Lubricity	
Viscosity / Texture	
Ageing resistance / Stability	
Adhesion / Grip	
Compatibility	Metals and some polymers
Application	Universal
Shelf life	3 years
Temperature range	-40 °C to +80 °C

Application fields

Classic universal grease to be used for :

- Precision micromechanics (watch, timer, measuring device , tools, ...)
- Instrumentation and counters (automotive, aeronautic, naval,...)
- General mechanics (office equipment, fans,...)
- Ball bearings, parts of mechanisms
- Lubrication of slow mobiles with large surface area or for dipping applications (spring, ...)

Radar chart

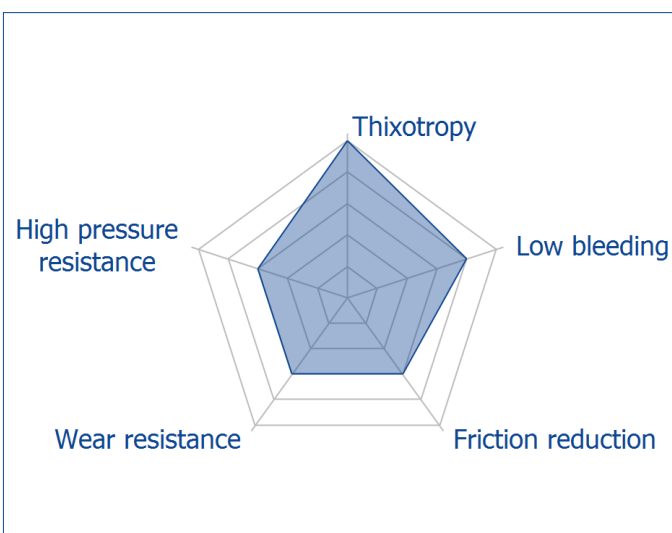

Storage

We advise keeping Moebius products in their original packaging in a clean and dry place, protected from light, ideally at a temperature of 15 to 26 °C.

After opening we recommend keeping the products for a maximum of 12 months.

