

CLASSIC GREASE 8212-SC

Classic grease for micromechanics



Description

Soft lubricant (Glissalube B) with red color. The vegetable oils used as an additive give it a good lubricating power. Developed for the lubrication of barrel drums, it provides moderate braking.

Especially recommended for aluminum barrel walls.



Technical features (indicative values)

Appearance	Beige
Penetration	185 1/10 mm
Drop point	102 °C
<hr/>	
Base oil	Mineral
Viscosity at 20°C	200 cSt
Refraction index at 20 °C	1.477
Pour point	-10 °C
Acidity	0.5 mg KOH / g


Unctuousness / Lubricity	
Viscosity / Texture	
Ageing resistance / Stability	
Adhesion / Grip	
Compatibility	Metals and et certain polymers
Application	Barrel wall
Shelf life	3 years
Temperature range	-40 °C to +80 °C

Application fields

Classic grease to be used for :

- Precision micromechanics (watch, timer, measuring device , tools, ...)
- Instrumentation and counters (automotive, aeronautic, naval,...)
- Micro motors and stepper motors
- General mechanics (office equipment, fans,...)
- Ball bearings, parts of mechanisms
- Lubrication of the barrel wall

Radar chart

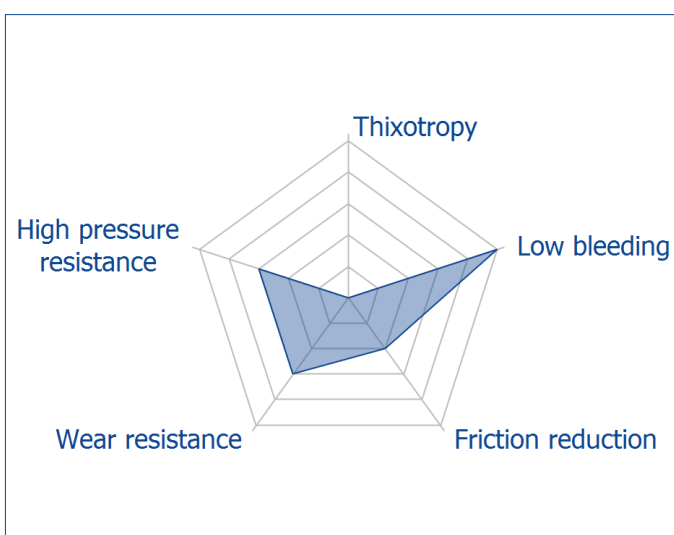

Storage

We advise keeping Moebius products in their original packaging in a clean and dry place, protected from light, ideally at a temperature of 15 to 26 °C.

After opening we recommend keeping the products for a maximum of 12 months.

