

CLASSIC GREASE 8213

Classic grease for micromechanics



Description

Hard grease (Glissalube A) with orange color. The vegetable oils used as an additive give it a good lubricating power. Developed for the lubrication of barrel drums, it provides effective braking. Also available in colorless version.

Especially recommended for brass barrel walls.



Technical features (indicative values)

Appearance	Orange
Penetration	75 1/10 mm
Drop point	100 °C
<hr/>	
Base oil	Mineral
Viscosity at 20°C	205 cSt
Refraction index at 20 °C	1.478
Pour point	-10 °C
Acidity	0.5 mg KOH / g


Unctuousness / Lubricity	
Viscosity / Texture	
Ageing resistance / Stability	
Adhesion / Grip	
Compatibility	Metals and et certain polymers
Application	Barrel wall
Shelf life	3 years
Temperature range	-40 °C to +80 °C

Application fields

Classic grease to be used for :

- Precision micromechanics (watch, timer, measuring device , tools, ...)
- Instrumentation and counters (automotive, aeronautic, naval,...)
- Micro motors and stepper motors
- General mechanics (office equipment, fans,...)
- Ball bearings, parts of mechanisms
- Lubrication of the barrel wall

Radar chart

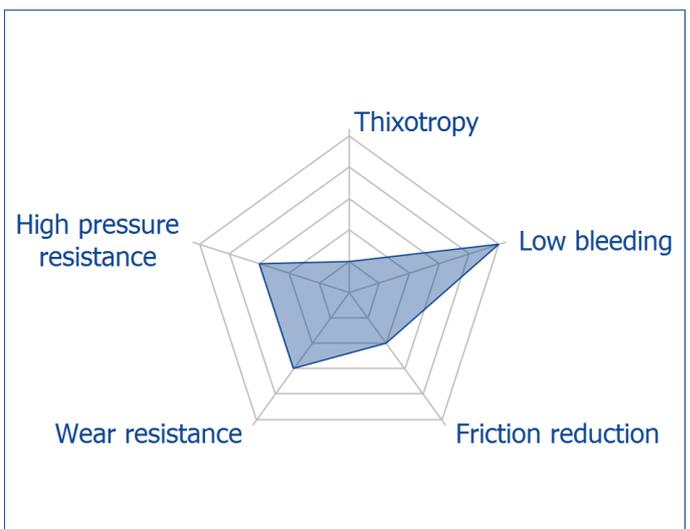

Storage

We advise keeping Moebius products in their original packaging in a clean and dry place, protected from light, ideally at a temperature of 15 to 26 °C.

After opening we recommend keeping the products for a maximum of 12 months.

