

TESTOIL 9703


Synthetic oil for micromechanics



Description

There exist 6 types of Test-oil. This kit with test-oils allows to control the quality of the (Fixodrop) epilame deposited on a surface.

Test oil # 3: Without epilame on the surface this oil spreads extremely easily compared to a classic watch oil. If the # 3 oil forms a drop and does not spread out entirely on the surface it confirms the good quality of the epilame.



Technical features (indicative values)

Appearance	Red
Viscosity at 0°C	99 cSt
Viscosity at 20°C	56 cSt
Viscosity at 40°C	35 cSt
Density at 20°C	1.00 g/ml
Refraction index at 20°C	1.432
Surface tension	21 mN/m


Unctuousness / Lubricity	
Viscosity / Texture	
Ageing resistance / Stability	
Adhesion / Grip	
Compatibility	Metals and polymers
Application	Epilame control
Shelf life	6 years
Temperature range	-40 °C to +100 °C

Application fields

Oil to be used for :

- Testing epilames on surfaces.
- Micro motors and stepper motors
- General mechanics (office equipment, fans,...)

Radar chart

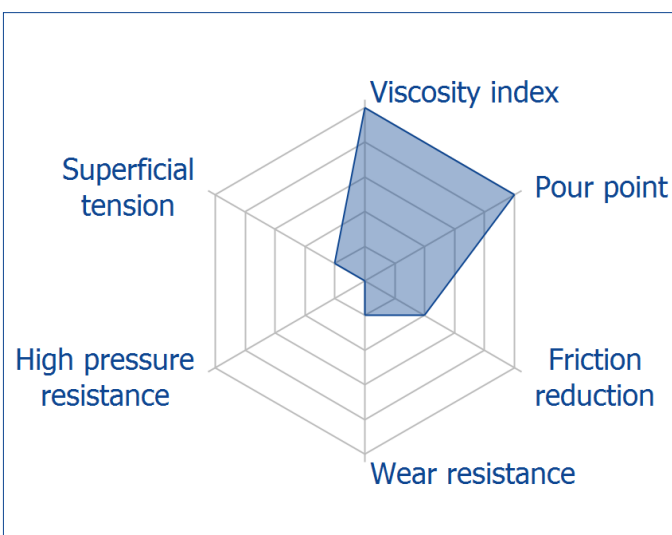

Storage

We advise keeping Moebius products in their original packaging in a clean and dry place, protected from light, ideally at a temperature of 15 to 26 °C.

After opening we recommend keeping the products for a maximum of 12 months.

