

MICROGLISS C-7

Classic oil for micromechanics



Description

The Microgliss C-7 oil is a mixture of mineral and vegetable oils especially selected for their good lubricity. It presents both very good grip and very good ageing resistance.



Technical features (indicative values)

Appearance	Yellow-brown
Viscosity at 0°C	2600 cSt
Viscosity at 20°C	350 cSt
Viscosity at 40°C	103 cSt
Pour point	-20 °C
Density at 20°C	0.890 g/ml
Refraction index at 20°C	1.489
Acidity	0.5 mg KOH / g


Unctuousness / Lubricity	
Viscosity / Texture	
Ageing resistance / Stability	
Adhesion / Grip	
Compatibility	Metals and certain polymers
Application	Universal
Shelf life	3 years
Temperature range	-15 °C to +100 °C

Application fields

Classic universal oil to be used for :

- Precision micromechanics (watch, timer, measuring devices, tools, ...)
- Instrumentation and counters (automotive, aeronautic, naval,...)
- Micro motors and stepper motors
- General mechanics (office equipment, fans,...)
- Lubrication of slow mobiles submitted to significant pressure and torque (gearing, certain wheels,...)

Radar chart

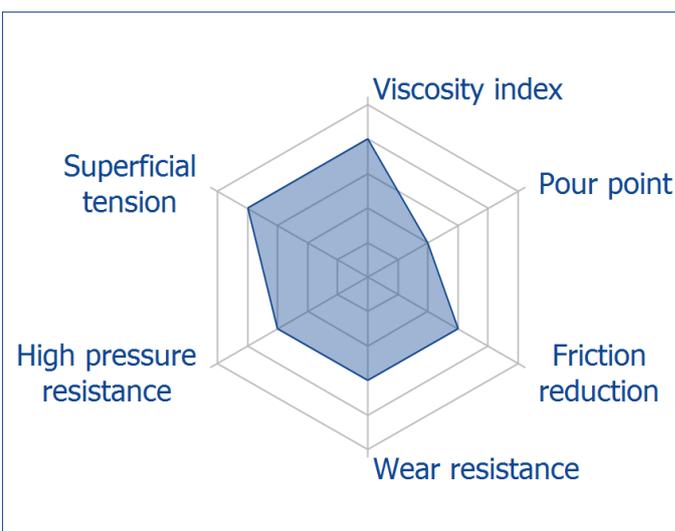

Storage

We advise keeping Moebius products in their original packaging in a clean and dry place, protected from light, ideally at a temperature of 15 to 26 °C.

After opening we recommend keeping the products for a maximum of 12 months.

