

MICROGLISS K-7

Classic oil for micromechanics



Description

This Microgliss oil has a very good lubricating power. Formulated with a wetting agent as well as an anti-corrosive agent, this product spreads perfectly. It is recommended for dip lubrication for applications with significant corrosion risk.



Technical features (indicative values)

Appearance	Brown
Viscosity at 0°C	630 cSt
Viscosity at 20°C	130 cSt
Viscosity at 40°C	42 cSt
Pour point	-25 °C
Density at 20°C	0.950 g/ml
Refraction index at 20 °C	1.488
Acidity	1.5 mg KOH / g

Unctuousness / Lubricity



Viscosity / Texture



Ageing resistance / Stability



Adhesion / Grip



Compatibility Metals and certain polymers

Application Dip lubrication & anti-corrosion

Shelf life 3 years


Temperature range -15 °C to +100 °C

Application fields

Classique anti-corrosion oil to be used for :

- Precision micromechanics (watch, timer, measuring devices, tools, ...)
- Instrumentation and counters (automotive, aeronautic, naval,...)
- Cameras and optical instruments
- General mechanics (office equipment, fans,...)
- Lubrication of slow mobiles with a large surface or for dip application (spring, ...)
- Lubrication of parts in difficult environments needing a good protection against corrosion and high pressure

Radar chart

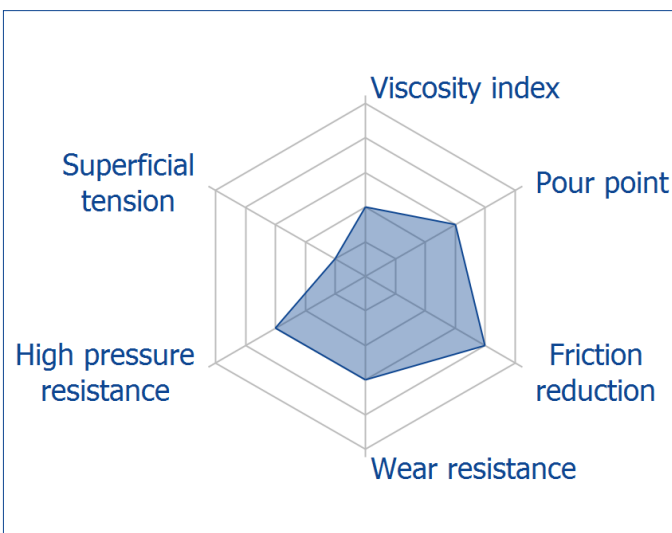

Storage

We advise keeping Moebius products in their original packaging in a clean and dry place, protected from light, ideally at a temperature of 15 to 26 °C.

After opening we recommend keeping the products for a maximum of 12 months.

